



SAFECO



An SABS ISO 9001
Quality Management
System certified company

SAFECO INDUSTRIAL SAFETY CAP



GME Approved
HH 2006-03-07
HH 2006-03-08

COMPLIANCE

- SABS Mark certification: 4886/12692
- Complies with SANS 1397:2003 standards
- Department of Minerals and Energy GME Approved
HH 2006-03-07
HH 2006-03-08
- 440 VAC insulated
- Proudly made in South Africa

PACKAGING

- 20 assm/40 un-assm per clear bag 750mm x 550mm x 240mm x 5.8kg
- 40 assm/80 un-assm per hessian export bag 1400mm x 550mm x 240mm x 11.6kg

INSTRUCTIONS FOR USE

The helmet provides limited protection against falling objects and bumps and is designed to absorb the energy of an impact by partial destruction or damage to shell, harness, or both. Although damage may not be apparent, helmets subjected to severe impact should be replaced.

Components of the helmet should not be removed or modified. Use only Safeco replacement parts.

Helmets should not be adapted for the purpose to fit attachments in any way. Inspect and maintain the helmet and headgear on a regular basis and replace damaged or worn parts. Replace complete harness.

Application of solvents, aerosols, paint, petroleum products and/or cleaning agents may cause damage to the helmet.


Use only a mild solution of soap and water to clean helmet. Record issue date for use on label inside shell. Recommended period of use is 2 years or as considered necessary by safety officer or user.

WARNING

To provide the protection the helmet headgear must be adjusted to size of the users head. This helmet provides limited protection to the upper head by reducing the effect of impact of objects striking the helmet.

Storage should be provided in a cool clean environment away from harmful ultra-violet light exposure. Packaging should be in a clear polypropylene or woven bags, for long distance shipment stack vertically in transit.

COLOURS

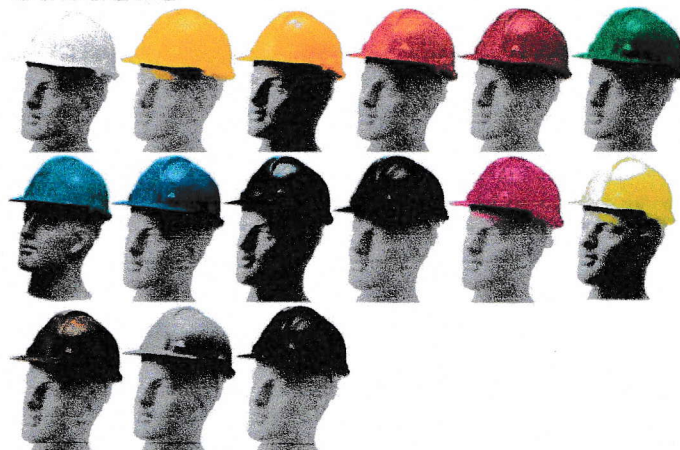

PRODUCT DESCRIPTION

- Poly Propylene shell
- 6 point headgear suspension system makes for unrivalled protection and comfort
- LDPE 2-part headgear with 2 stage height adjustment and a Tricot cushion sweatband
- 6 pin low slung buckle fastening system with adjustment from 500mm to 640mm
- Central raised channel with auxiliary channels run over the top of the cap providing superior vertical rigidity and impact resistance
- A gutter to divert water around the cap shell away from the neck and off the peak. It also provides lateral rigidity
- Side slots for a wide variety of accessory attachments
- Flat front panel allows for embossing, stickers or lamp brackets
- 40mm peak provides shade as well as facial protection from falling objects
- 3 lugs allow for the attachment of 2 & 3 point chinstraps

TECHNICAL SPECIFICATIONS

- One size fits all: 50cm - 64cm
- 284g assembled weight
- 6 point suspension
- 6 pin low slung buckle adjustment 500mm to 640mm
- 40mm Peaked brim
- 270 degree gutter
- Accessory slots
- 3 lugs for chinstraps
- Materials: PP Shell, LDPE 2-part liner and Tricot cushion sweatband
- Shell colours: White, Yellow, Sun Yellow, Orange, Red, Green, Sasol Blue, Royal Blue, Navy Blue, Purple, Bright Pink, Lime, Brown, Grey and Black.
- Lining colour: Natural
- Sweatband colour: Black

PE LINER



- SABS Mark certification: 4886/12692
- LDPE 2-part headgear with 2 stage height adjustment and a Tricot cushion sweatband.
- 6 point lining suspension system makes for unrivalled protection and comfort
- 6 pin low slung buckle fastening system adjustable from 500mm to 640mm

